

RADIANCE

ELECTRIC RADIANT HEATER

DIRECT AND COSY HEAT



MADE IN
FRANCE



COLOR



Smooth white
satin


Noirot

RADIANCE

Technical specifications

Compact size and radiant heat directly felt by the body

Its perforated front allows the radiation of its ultra-emissive dual emitter to pass fully

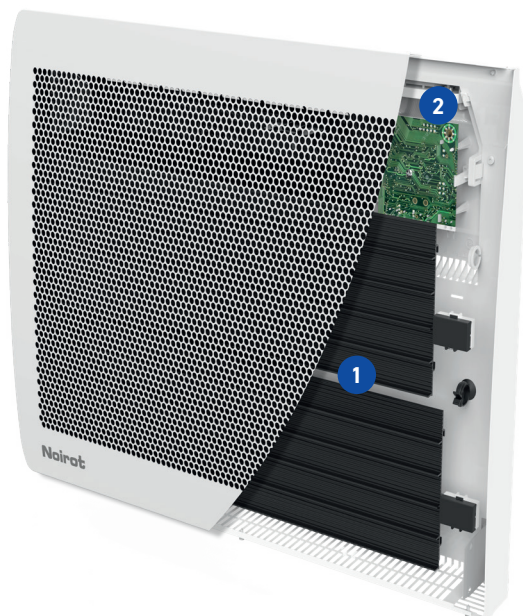

1 SINGLE-BLOCK ALUMINUM HEATING DUAL RADIANT TRANSMITTER

- The geometry of the front face of the ribbed radiant transmitter reinforces emissions and limits the movement of air to the benefit of radiation.
- A specific surface treatment, different between the 2 sides is applied to direct and optimize heating emission forward.



2 INTELLIGENT PROGRAMMING AND ENERGY SAVING FUNCTIONS

- 3 pre-set programmes and 3 free programmes
- Ultra-precise electronic control
- Open window detection
- PIN code control lock
- Temperature setpoint framing
- 6-order pilot wire control.



HORIZONTAL MODELS

1,5m power cord with EU plug

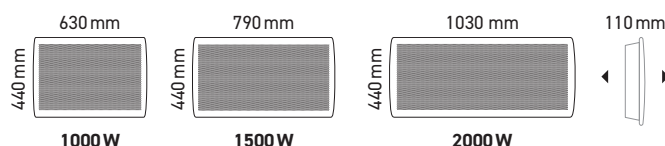

Castor kit
for mobile use (optional)

Power	Width	Height	Depth*	weight	Smooth white
Watts	mm	mm	mm	kg	Reference
1000	630	440	110	4,7	E184113
1500	790	440	110	5,9	E184115
2000	1030	440	110	7,3	E184117
Castor kit (optional)					A691600

* Depth: when wall-mounted, including self-gauging H bracket
1.5 m power cord with European plug

IP 24
IK 08

Classe II



Noirod : 28 rue de verdun, 92160 Suresnes

Export Department - export@groupe-intuis.fr - +33 1 53 06 26 05 (Monday to Thursday
8:30am to 5:30pm Friday from 8:30am to 4 pm)

Noirod